


## **CP99E**

CxC

DZR BRASS BALL VALVE FULL FLOW -10 °C to +120 °C

<image><section-header><section-header>

MATERIALS							
Body:	DZR Brass CW602N						
Ball:	Hard Chrome Plated DZR and/or Brass*						
End Cap:	DZR Brass CW602N						
Seats:	PTFE						
Extension spindle:	Nickel Plated Brass						
Lever:	Pressed Steel						
O-Ring:	EPDM						
Stem:	Nickel Plated DZR and/or Brass*						

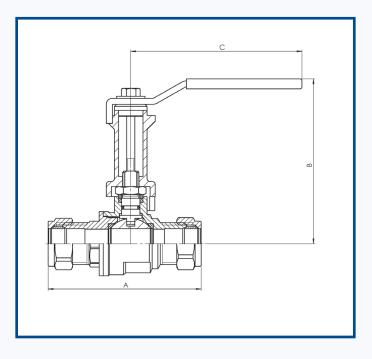

\*Applicable to 35mm/42mm/54mm versions

CONNECTIONS Compression x Compression

SIZE		15mm	22mm	28mm	35mm	42mm	54mm		
A (mm)		75.0	84.5	90.5	105.0	118.0	141.5		
B (mm)		82.0	86.0	87.0	93.0	112.0	130.0		
C (mm)		84.0	84.0	120.0	120.0	163.0	163.0		
Rating		PN32	PN32	PN32	PN25	PN25	PN25		
Weight (kg)		0.330	0.450	0.750	1.000	1.620	2.440		

Pressure and temperature ratings are minimum and maximum values only and actual performance will be dependant upon application. All images on this page are for guidance only. E&OE. We reserve the right to amend specifications, prices & products without prior notification